

1


2

3

4

NOTES:

- (1) PURGE ALL WATER SUPPLY LINES TO REMOVE SOLIDS PRIOR TO TOY INSTALLATION.
- (2) PROVIDE ELECTRICAL BOND WITH POOL REBAR.
- (3) INSTALL ALL WATER TOYS PLUMB AND LEVEL.
- (4) PROVIDE STRAINER UPSTREAM OF TOY WITH MAX 1/32" (0.8mm) PERFORATIONS.

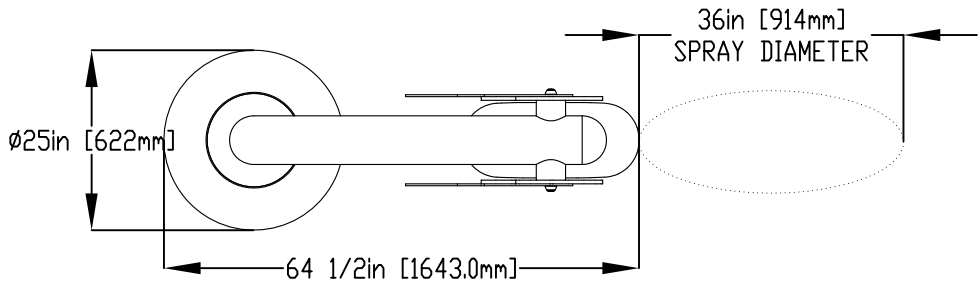

A



A

B

B

C

C

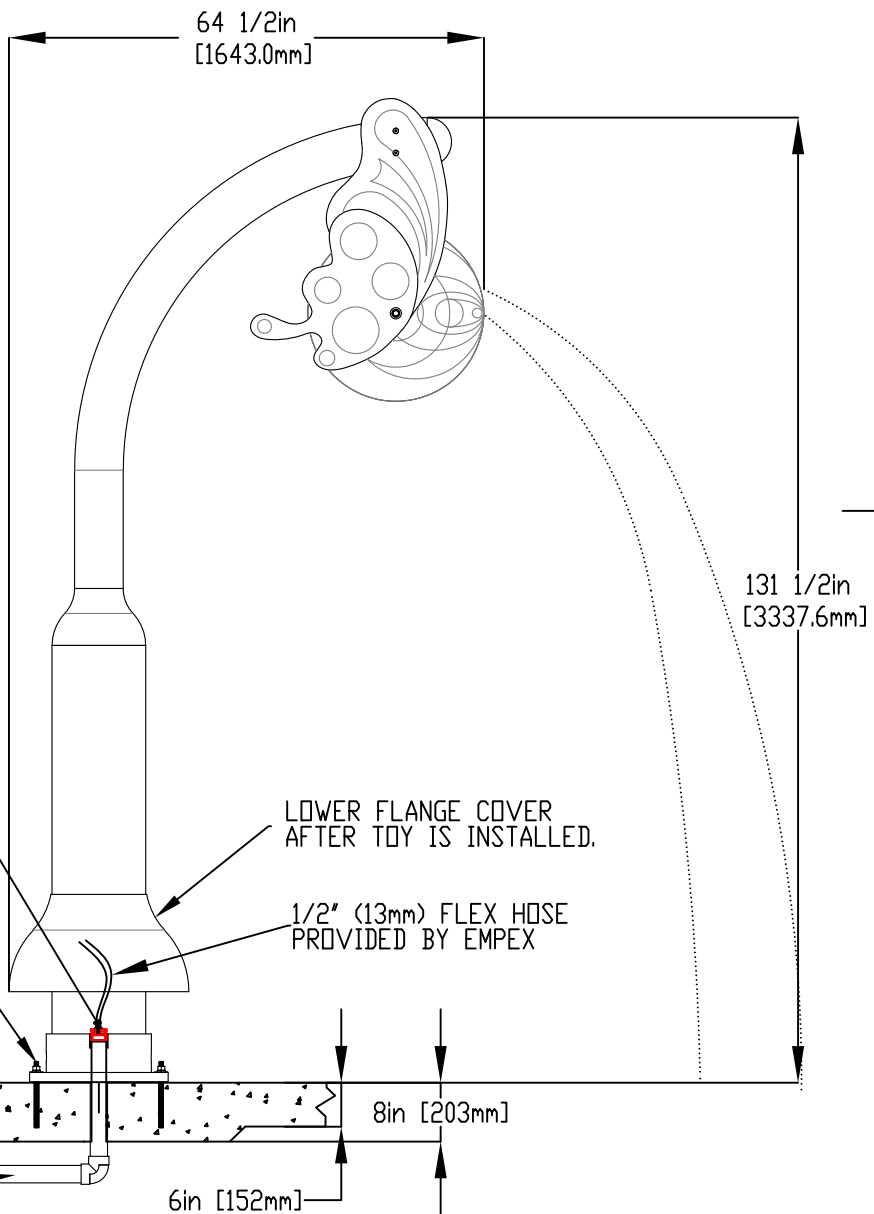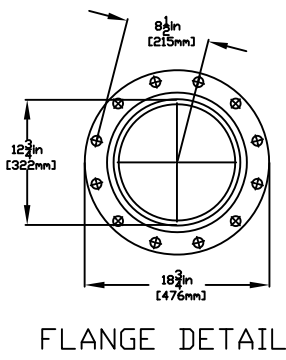

D

D

E

E

- 2" (50mm) COUPLING
- 2" (50mm)-1/2" (13mm) REDUCER
- 1/2" (13mm) HOSEBARB C/W SS CLAMP TO BE PROVIDED BY CONTRACTOR
- 5/8" (16mm) X 9" (230mm) 316SS THREADED ROD C/W FENDER WASHER, LOCK WASHER & NU (X6). MINIMUM 6" (152mm) EMBEDMENT, EPOXY SET ANCHOR ADHESIVE TO BE PROVIDED BY CONTRACTOR

- LOWER FLANGE COVER AFTER TOY IS INSTALLED.
- 1/2" (13mm) FLEX HOSE PROVIDED BY EMPEX

WATERFEED  
 2" (50mm) SCH 40 PVC PIPE  
 EXTEND 6" (152mm) ABOVE SLAB

F

F



Notes: Overall dimensions of toys are approximate.

© EMPEX WATERTOYS

WATER SUPPLY  
 10 gpm @ 25 psi  
 0.63 L/S @ 17.5m

AQUADUNK BUTTERFLY

T816-B

6/15/2016

SCALE:

Sheet 1 of 1

1

2

3

4